



PRODUCT SPECIFICATIONS SHEET

| | |
|--|--|
| Class of Use | B (Group 3) |
| Weight Capacity | 300 lbs. (136 kg/21 stone 6 lbs.) |
| Maximum Speed ¹ | Up to 6.25 mph (10 km/h) Up to 4 mph (6.4 km/h), only United Kingdom Up to 3.5 mph (5.6 km/h) with iLevel® Up to 3 mph (4.8 km/h) with iLevel® United Kingdom |
| Ground Clearance ² | 2.7 in. (69 mm) at battery tray |
| Turning Radius ² | 20.5 in. (521 mm) |
| Overall Size ^{2, 6} | Stowage Length: 32.2 in. (819 mm) without front riggings Length: 35.5 in. (902 mm) without front riggings Width: 24.4 in. (622 mm) |
| Drive Wheels | 14 in. (355.6 mm), pneumatic and solid available |
| Caster Wheels | 6 in. (152 mm) |
| Suspension | ATX Suspension (Active-Trac® with extra stability) |
| Range ^{1, 4} | Up to 19.7 miles (32 km) Up to 17.71 miles (28.5 km) with extended-traction knobby tires and with 62 Ah batteries |
| Component Weights ^{5, 7} | Base: 138.6 lbs (63 kg) Batteries: 38 lbs. (17.24 kg) each Total Mass of Power Chair: Less than 388.6 lbs. (176.3 kg) with Captain Seating |
| Drivetrain | Two motor, Mid-wheel 6® drive |
| Brakes | "Intelligent Braking" electronic regenerative, disc park brake |
| Batteries ³ | Two 12-volt, deep-cycle NF-22 batteries |
| Battery Charger | 8-amp, off-board |
| Freewheel Operational Force | Less than 60 N |
| Drive Control Operational Force | Less than 5 N |
| Maximum Rated Slope | 7.5° (13.2%) only United States 6° (10.5%) |
| Maximum Obstacle Climbing Ability (Ascending and Descending) | 3.5 in (90 mm) |
| Measured Sound Level (A-weighted) | Less than 65 dB |

¹ Varies with base model, user weight, terrain type, battery amp hour rating (Ah), battery charge, battery condition, motors, controller type, tire type, and tire condition. This specification is subject to a variance of +10%, -5%.

² Due to manufacturing tolerances and continued product improvement, this specification can be subject to a variance of (+ or -) 3%.

³ AGM, Gel-Cell, or Hybrid Gel (Hybrid Gel is defined as Nano Silica Gel Electrolyte with High Quality Glass Mat Separators) type required. See "Batteries and Charging."

⁴ Tested in accordance with ANSI/RESNA, WC Vol. 2, Section 4 & ISO 7176-4 standards. Results derived from theoretical calculations based on battery specifications and drive system performance. Test conducted at maximum weight capacity.

⁵ Battery weight may vary based on manufacturer.

⁶ Dimensions listed are for power base only. Overall measurements will vary based on seating and accessory selections.

NOTE: This product conforms to all applicable ANSI/RESNA, ISO 7176 Series, AS/NZS 3695.2, and EN12184 standards. All specifications subject to change without notice.

Rev I/October 2022






ACN 088 609 661



I N F I N I T Y B 3 3 2 3

Q6 Edge[®] 2.0

PRODUCT SPECIFICATIONS SHEET

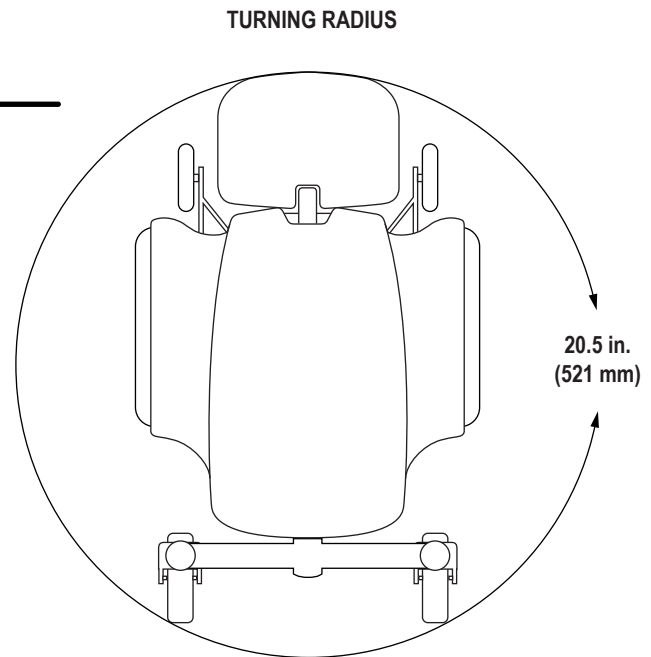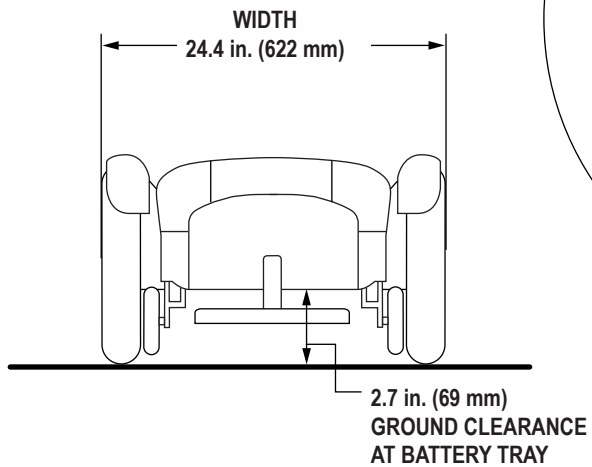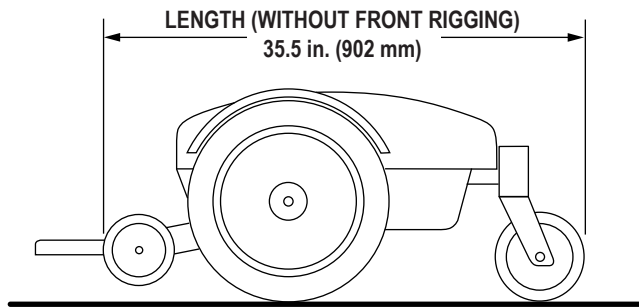

Rev I/October 2022

